


SOLAR FRONTIER

I-V Curve

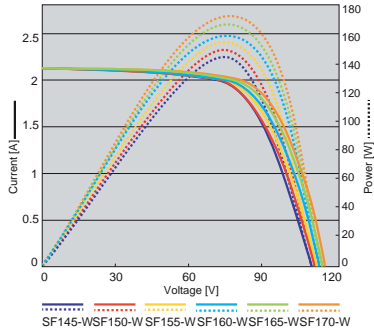

STC Characteristics

		SF145-W	SF150-W	SF155-W	SF160-W	SF165-W	SF170-W
Nominal power	Pmax	145 W	150 W	155 W	160 W	165 W	170 W
Module efficiency	%	11.8 %	12.2 %	12.6 %	13.0 %	13.4 %	13.8 %
Power tolerance		+5 W/ 0 W					
Open circuit voltage	Voc	107.0 V	108.0 V	109.0 V	110.0 V	110.0 V	112.0 V
Short circuit current	Isc	2.20 A	2.20 A	2.20 A	2.20 A	2.20 A	2.20 A
Voltage at nominal power	Vmpp	81.0 V	81.5 V	82.5 V	84.0 V	85.5 V	87.5 V
Current at nominal power	Imp	1.80 A	1.85 A	1.88 A	1.91 A	1.93 A	1.95 A

Standard Test Conditions (STC): 1,000 W/m² irradiance, module temperature 25 °C, air mass 1.5. Isc and Voc are ±10 % tolerance of STC rated values. Module output may rise due to the Light Soaking effect. Subject to simulator measurement uncertainty (using best-in-class AAA solar simulator and applying Solar Frontier preconditioning requirements): +10 % / -5 %.

Certificates and Guarantee




All new product classes are subject to immediate certification
 Product guarantee: 5 years (extended guarantee upon request)
 Power output guarantee: 90 % for 10 years, 80 % for 25 years

NOCT Characteristics

		SF145W	SF150W	SF155W	SF160W	SF165W	SF170W
Nominal power	Pmax	108 W	111 W	115 W	119 W	123 W	126 W
Open circuit voltage	Voc	97.4 V	98.3 V	99.2 V	100.0 V	100.0 V	102.0 V
Short circuit current	Isc	1.76 A	1.76 A	1.76 A	1.76 A	1.76 A	1.76 A
Voltage at nominal power	Vmpp	76.0 V	76.4 V	77.4 V	78.8 V	80.2 V	82.1 V
Current at nominal power	Imp	1.43 A	1.47 A	1.49 A	1.51 A	1.53 A	1.55 A

Nominal Operating Cell Temperature Conditions: Module operating temperature at 800 W/m² irradiance, air temperature 20 °C, wind speed 1 m/s and open circuit condition.

Module Drawing

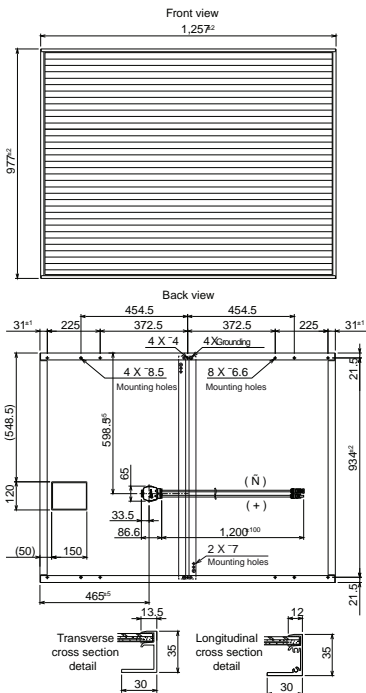

Performance at Low Irradiance

Efficiency reduction of maximum power from an irradiance of 1,000 W/m² to 200 W/m² at 25 °C is typically 2.0 %. The standard deviation for the reduction of efficiency is 1.9 %.

Temperature Characteristics

NOCT		47 °C
Temperature coefficient of Isc	#	+0.01 %/K
Temperature coefficient of Voc	\$	-0.30 %/K
Temperature coefficient of Pmax	%	-0.31 %/K

Mechanical Characteristics

Dimensions (L x W x H)	1,257 x 977 x 35 mm (49.5 x 38.5 x 1.4 in.)
Weight	20 kg (44.1 lbs)
Application class (IEC 61730)	Class A
Fire rating (IEC 61730)	Class C
Safety class (IEC 61140)	II
Snow load	5,400 Pa (IEC 61646) / 3,600 Pa design load (UL 1703)
Wind load	2,400 Pa (IEC 61646) / 1,600 Pa design load (UL 1703)
Cell type	CIS glass substrate (cadmium free)
Front cover	Clear tempered glass, 3.2 mm
Encapsulant	EVA
Back sheet	Weatherproof plastic P1m (color: black & silver)
Frame	Anodized aluminum alloy (color: black)
Edge sealant	Butyl rubber
Junction box	Protection rating: IP67 (with bypass diode)
Adhesive	Silicone
Output cables (conductor)	2.5 mm ² / AWG14 (halogen free)
Cable lengths (symmetrical)	1,200 mm (47.2 in.)
Connectors	MC4 compatible
Packing information	N P E V M F T Q B M M F U t Q B M M F U T

Contact Information

Solar Frontier Europe
 Grünwald bei München, Germany
 Tel: +49 89 92 86 142 0

Solar Frontier Italy
 Bari, Italy | Tel: +39 080 89 66 984

Solar Frontier K.K. (Headquarter)
 Tokyo, Japan | Tel: +81 3 5531 5626

Solar Frontier Middle East
 Al Khobar, Kingdom of Saudi-Arabia
 Tel: +966 3882 0260

Solar Frontier Americas
 Santa Clara, CA, USA | Tel: +1 408 916 4150

!!!"#\$\$%&'()*\$+,-"/
 !!!"#\$\$%&'()*\$+,-"/0\$1/