

Technical data

TS CIGS SERIE

højeffektivt CIGS solcellemodul

Electrical Characteristics

Standard Test Conditions (STC)

TS CIGS Series		TS-145C2	TS-150C2	TS-155C2	TS-160C2	TS-165C2		
Max power	P_{max}	145	150	155	160	165	W_p	
Factory binning		+5/-0	+5/-0	+5/-0	+5/-0	+5/-0	W	
Open-circuit voltage	V_{oc}	85.2	86.1	86.9	87.8	88.7	V	
Short-circuit current	I_{sc}	2.66	2.66	2.66	2.66	2.66	A	
Max power voltage	V_{mpp}	60.4	62.5	64.6	66.7	68.5	V	
Max power current	I_{mpp}	2.40	2.40	2.40	2.40	2.41	A	
Module efficiency	Eff%	13.3	13.8	14.3	14.7	15.2	%	
Max reverse current	I_R	6.5 A						
Max system voltage		1000 Vdc [IEC], 600 Vdc [UL]						
Operating temperature		-40°C to 85°C						

IV Parameters measured at STC: 1000 W/m², module temperature 25°C, AM 1.5 after factory light soaking. All IV ratings are +/- 10%.

Pre-binning power tolerance of +/-5%, as certified by UL/TÜV-SÜD. TSMC Solar only delivers modules with greater than or equal to nameplate power.

Normal Operating Cell Temperature Conditions (NOCT)

		109.4	113.2	116.9	120.7	124.6	W
Max power	P_{max}						
Open-circuit voltage	V_{oc}	79.3	80.2	80.9	81.8	82.6	V
Short-circuit current	I_{sc}	2.14	2.14	2.14	2.14	2.14	A
Max power voltage	V_{mpp}	56.8	58.7	60.7	62.7	64.4	V
Max power current	I_{mpp}	1.93	1.93	1.93	1.93	1.93	A

Conditions at NOCT: 800 W/m², ambient temperature 20°C, AM 1.5

Thermal Characteristics

NOCT	46.5 ± 1°C
Temperature Coefficient of P_{max}	-0.30% / °C
Temperature Coefficient of V_{oc}	-0.29% / °C
Temperature Coefficient of I_{sc}	0.01% / °C


Mechanical Characteristics

Snow/wind load (IEC)	2,400 Pa
Dimensions in mm	1656 x 656 x 35
Weight in kg	17.5
Frame	Black anodised aluminum
Front cover	Anti-reflective coated, textured white tempered glass
Junction box, connector	IP 67, MC-4 compatible
Output cable cross section and length	2.5 mm ² , 1000 mm
Cell type	133 CIGS cells
Safety class	II
Fire rating	Class C

The information contained herein is subject to change without notice.


Caution: Read the installation guidelines before using, handling, installing or operating TSMC Solar modules.

Physical Specifications

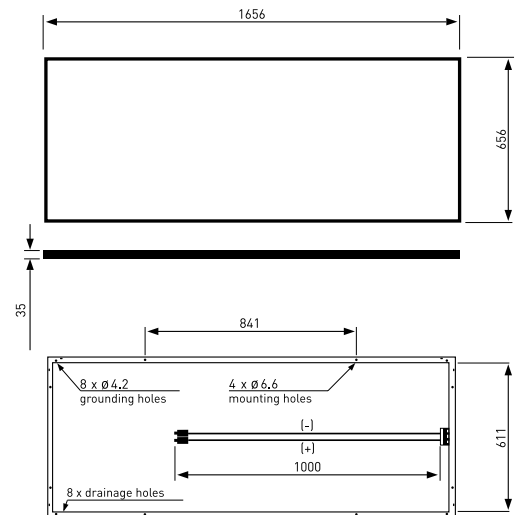

All measurements in mm

I-V and P-V Curve (TS-155C2)

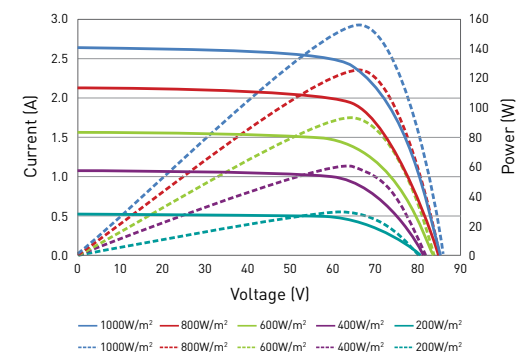

Performance at Low Irradiance

Typical relative efficiency reduction of maximum power from an irradiance of 1,000 W/m² to 200 W/m² at 25°C is 7%.

Certifications



tsmc solar.

Get in contact with us!
We look forward to your call or your e-mail!

EUROPE
TSMC Solar Europe GmbH
Am Kaiserkai 1
20457 Hamburg, Germany
Tel.: +49 (0) 40 / 80 80 745 40
SolarEU@tsmc.com

NORTH AMERICA
TSMC Solar North America
2595 Junction Avenue
San Jose, CA 95134, USA
Tel.: +1 408 678 2816
SolarNA@tsmc.com

ASIA/REST OF WORLD
TSMC Solar Ltd.
5, Keya W. Rd., Daya Dist.
Taichung, Taiwan 428-82
Tel.: +886 4 27 03 66 88
SolarAsia@tsmc.com

tsmc A TSMC Company

© 2011-2015 TSMC and TSMC Solar. All rights reserved. TSMC, tsmc, tsmc solar and the tsmc logo are trademarks of TSMC and TSMC Solar. All other trademarks mentioned herein are the property of their respective owners.

DS-TSC2-EU-EN-01/15-01